

# CST-300

## Tube and Gas Cylinder Cleaner Shot-blasting Machine



### Application

The CST-300 shot-blasting machine is mainly suitable for continuous cleaning and descaling the outer surface of tubes, gas cylinders and other cylindrical work-pieces.



### Technical description

The equipment has 2 pieces of ABR-D400 type blasting turbines. The turbines are located over the transport plane of the roller conveyor. Blast cleaning happens in a parallel plane with proceeding direction.

The turbines are of gravity abrasive feeding ones, having mechanic accelerator, control cage and 8 blades to ensure an accurate abrasive jet direction adjustment opportunity.

The chamber internal surfaces in access of the active abrasive jet are covered with highly abrasion-resistant manganese steel plate, while other surfaces are protected with thick wear resistant rubber cover.

At the inlet and outlet cross sections of the machine housing wear resistant rubber curtains protect against shots leaving the machine.

The continuous and closed flow loop of abrasive is assured by a collecting hopper with screw, bucket elevator, air classifier abrasive cleaning unit, dosing unit and turbines.

During cleaning process the work-piece has straight line proceeding movement and rotates around its own axis in the same time. This movement is provided by a special diabolic roller conveyor. All of the rollers are driven. Faster operation of the machine can be reached by automatic loader and unloader unit optionally.

To exhaust and filtrate the created dust during blast-cleaning we supply an APSZ type cartridge filter c/w fan and suitable ductwork.

The air leaving filtration system has less dust content than  $3 \text{ mg/m}^3$ .


A central control board will be supplied for controlling all functions of the machine.

Normal operation shall be carried out in automatic set position, however there is hand operation option also provided for service functions.



CST-300

## Measure print /CST-300/

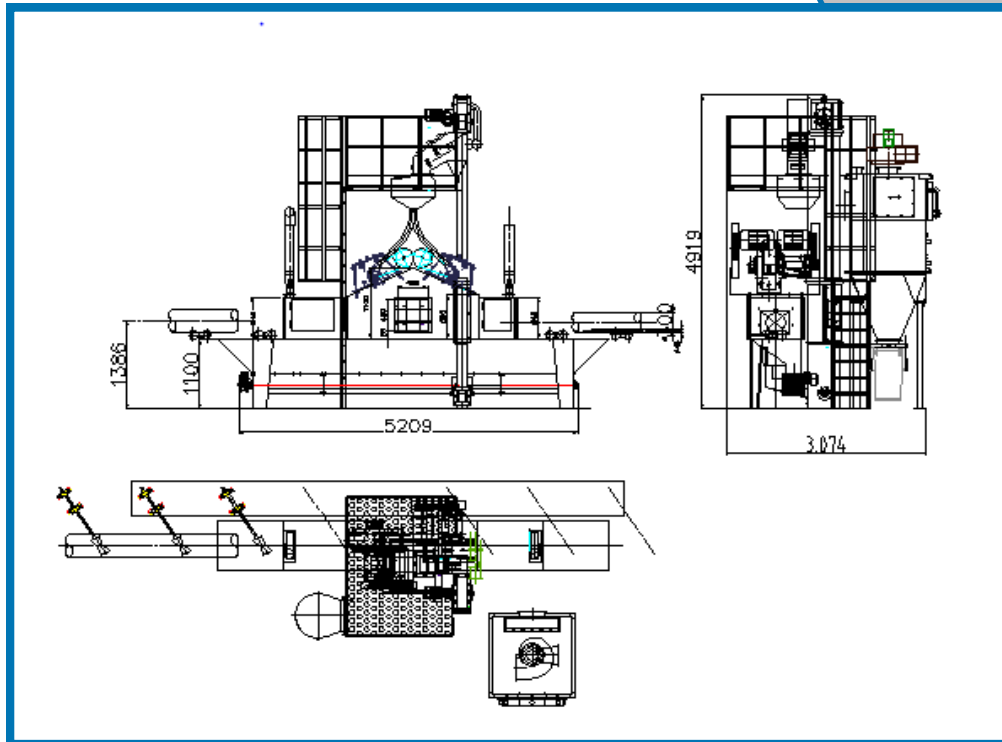

## Technical data

Minimal work-piece diameter	mm	30
Min. work-piece length	mm	500
Maximal work-piece diameter	mm	300
Turbines	Quantity	pcs 2
	Type	ABR -D 400
	Wheel diameter	mm 400
	Wheel speed	RPM 2900
	Abrasive capacity / turbine	Kg/min 130-300
Roller conveyor	Load capacity	Kg/m 200
	Speed (adjustable)	m/min 0-4
Energy demand (at minimal performance)		
	Electrical	Basic Machine kW 42
		Aspiration kW 7,5
	Compressed air	Pressure bar Min. 6
		Quantity m <sup>3</sup> /h 10
Abrasive charge	Kg	1000
Suggested abrasive size	mm	0,4-1,6
Aspiration capacity	m <sup>3</sup> /h	5000
Electrical data	Voltage	V 3*400
	Control voltage	V 230
	Cycles	Hz 50