

Air supported belt-conveyor



Application

The Air Supported Beltconveyor is designed for handling a variety of dry, free flowing bulk materials either horizontally, on an incline or a combination of both.

The ASB can be reversible and/or movable.


Optional extras

- Stainless steel construction.
- Bend section for application requiring both horizontal and inclined conveying.
- Totally enclosed.
- Dust-tight or even gas tight if necessary.

Benefits

- Gentle material handling.
- No segregation.
- Efficient and simply designed.
- Custom-built to suit individual requirements.
- Low maintenance costs because of floating on air, instead of running over rollers.
- Suitable for very long transport.
- Low energy consumption.



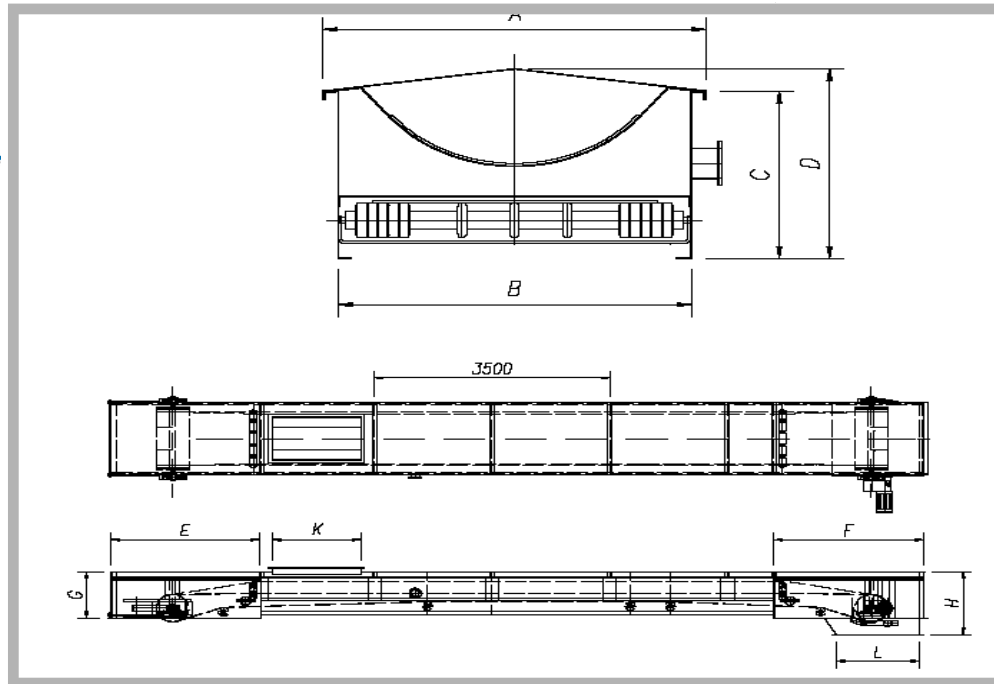

Type	A	B	C	D	E	F	G	H	K	L
ASB400	590	530	385	430	1615	1310	465	715	700	840
ASB500	690	630	400	450	1730	1410	490	740	800	900
ASB650	860	780	415	485	1905	1560	525	775	950	1000
ASB800	1070	990	520	600	2215	1815	650	900	1100	1160
ASB1000	1290	1190	550	650	2535	2175	710	960	1100	1400
ASB1200	1570	1320	700	810	3010	2810	885	1135	1700	1800
ASB1400	1750	1450	800	920	3295	3065	1000	1250	1900	1970

