

APSZ-01 type cartridge filter equipment



Characteristics

The APSZ cartridge dust filter can be used for filtering the dust flown by the air.

The APSZ-01 filtering system ensures high efficiency, continuous, on-the-spot dust filtering both for air polluting problems and during production processes.

Filter cartridge dimensions: diam. 324 x 660 mm.

APSZ-01

Operation

The polluted air gets into the cartridge filter through the inlet hole, from there it gets onto the filter where the dust settles down on the outer surface of the filter.

The clean, filtered air passes through the filter then the clean air leaves through the outlet of the filtering system.


The filter has an automatic, compressed air cleaning, blow-off system.



APSZ-01 type cartridge dust filter -, dust aspiration equipment

Technical data

Number of filter cartridges	1 piece	diam. 324 x 660 mm
Transport capacity	500 – 700	m ³ / h
Impeller	1 piece	
Motor capacity	0.75 – 1.1	kW
Air consumption	5 – 6 bar	1 – 2 m ³ / h
Height	1500	mm
Width	650	mm
Depth	650	mm

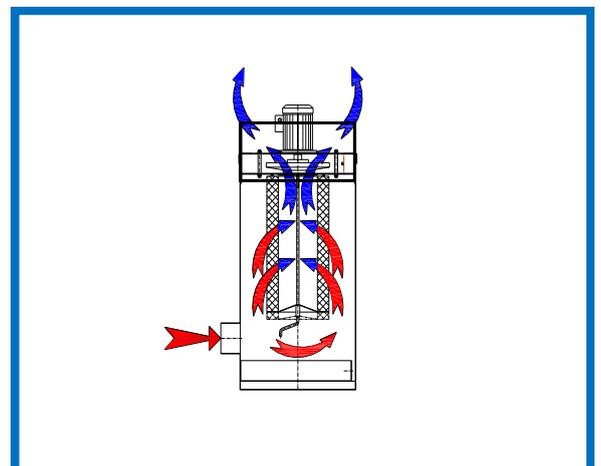

ABRAZIV Engineering Office and Machine Mfg. Ltd.

H-6000 Kecskemét, Paul Lechler u. 3.

WEB: www.abraziv.hu

Tel.: +36 (76) 815 - 900

Fax: +36 (76) 815 - 901

E-mail: sbtech@abraziv.hu

Application

- Shot-blasting cabin;
- Smaller capacity hand tools or machines for aspiration,
e.g.: grinding machine, sanding machine, welding machine,
flame-cutter, plasma-cutter;
- Smoke aspiration.



APSZ: the proper solution for all demands in the field of dust separation

